



# Truck-mounted concrete pump

# BSF 52.16 H

Output up to 200 m<sup>3</sup>/h  
Delivery pressure up to 130 bar

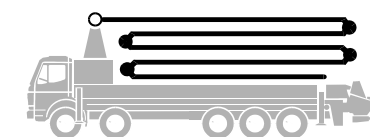

**.16 H LS**  
**.20 H**

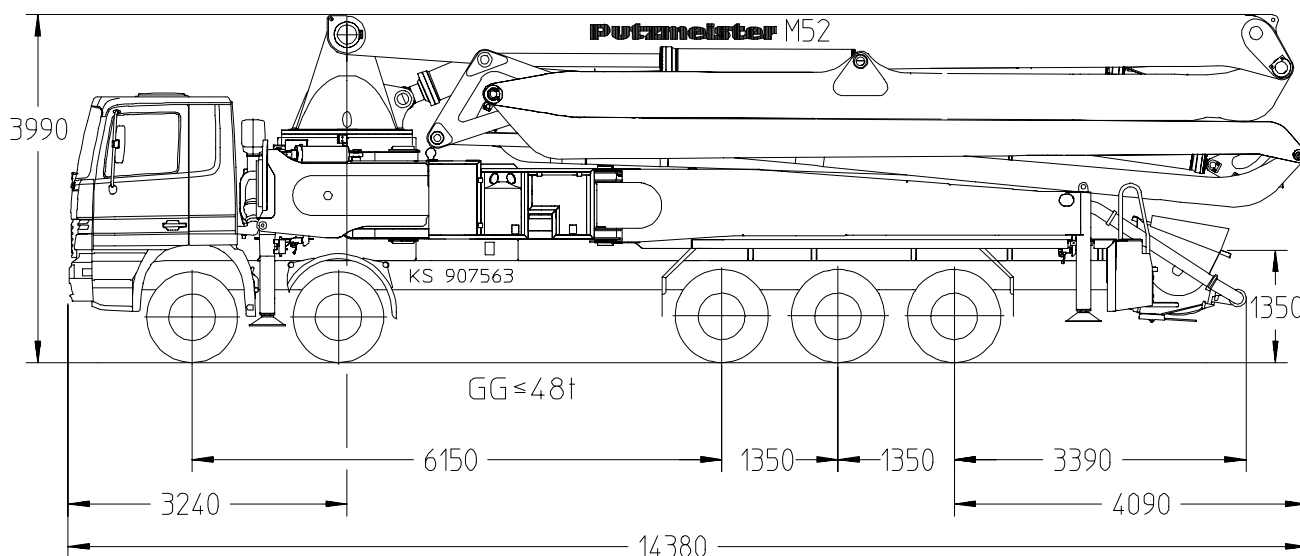

Note: Standard version. Dimensions and weights depend on truck pump model and equipment.  
Dimensions in mm, MB-Actros 5050 as example

## Technical Data

Boom M 52-5		
Reach height	m	52.0
Horizontal reach	gross	m 48.1
	net	m 44.9
Reach depth max.	m	38.1
Unfolding height	m	10.4
End hose length	m	4
Number of arms	5	
Folding system	Multi-Z fold (MZ)	
Delivery line	DN 125/5.5	

Pump		BSF	.16 H	.16 H LS	.20 H
Rod side	Output	m <sup>3</sup> /h	160	-	-
	Delivery pressure	bar	85	-	-
	Strokes	1/min.	31	-	-
Piston side	Output	m <sup>3</sup> /h	108	160	200
	Delivery pressure	bar	130	85	85
	Strokes	1/min.	21	26	26
	Delivery cylinder	∅ mm	230	250	280
	Stroke	mm	2100	2100	2100

Delivery line boom max. 85 bar.  
All data maximum theoretical.

